


Electric Locks from Abloy Security

Solenoid lock EL560

Wiring diagram

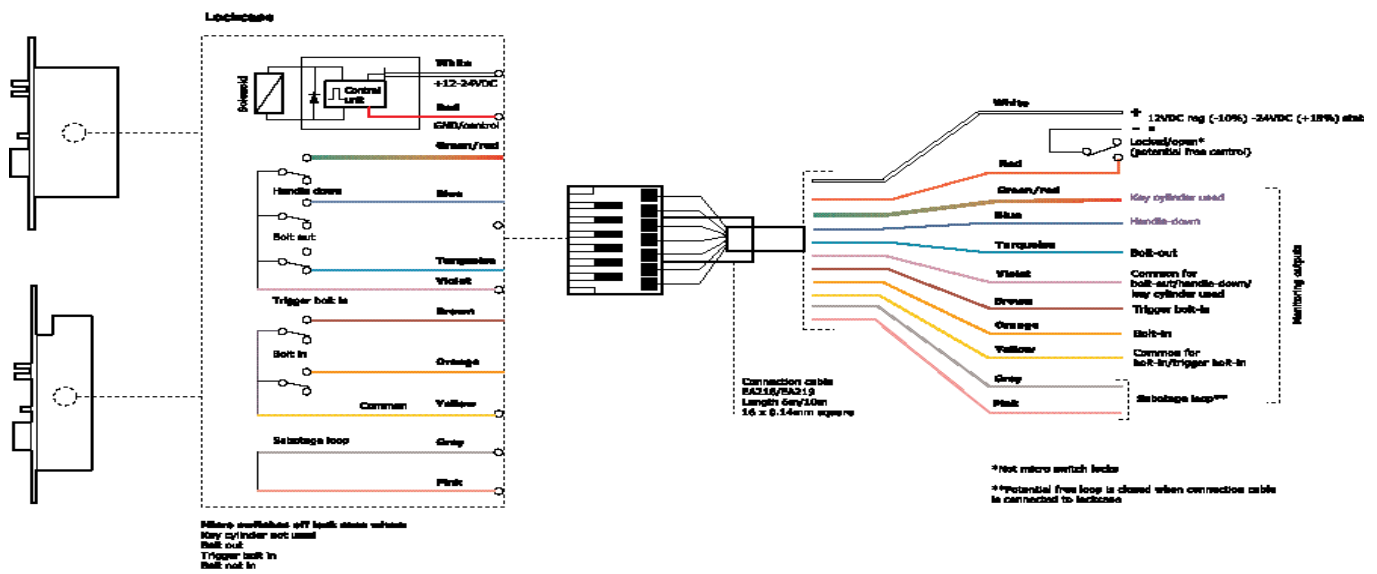

Specification

Operating voltage	
+15%, -10%	12 - 24VDC stabilized
Current	
12VDC	450 mA max.
24VDC	650 mA max.
Operating temperature range (°C)	-20°C to +60°C
Backset (mm)	
Standard	65
Special	55 and 60
Forend (mm)	
Standard	24
Special	20
Follower	9
Forend finish	stainless steel

Accessories

Cylinder Single	CY303
	CY313
	CY307
	CY317
Strike	EA322
Handles	60-0319-SSS
	60-0419-SSS
Cable (included)	EA218
Rebate sets (optional)	Reb 21, 22 or 23
Spindle converter (8 - 9mm) Included	807227



Abloy Security Limited, 1/3 Hatters Lane, Croxley Business Park, Watford, Hertfordshire, WD18 8QY

01923 255066 01923 230281 sales@abloysecurity.co.uk / www.abloysecurity.co.uk