



Multiblindo Motion

Perfect combination of comfort and security in any situation.

The new electromechanical automatic lock represents the electronic evolution of Multiblindo Easy.

From the outside it operates by key or the most advanced electronic access control systems: fingerscan, keyboard, transponder, PIN-code. From the inside it operates electronically in a simple and fast way through a normal keyboard, allowing the end user to set three different locking functions: Total, Light, Free.



It is certified

according with EN14846:08 and prEN15685:09 European standards.

Multiblindo eMotion ensures top-level intrusion protection; it doesn't lose the settings in case of a blackout and, if necessary, it always assures the mechanical key or handle action.

Example of certification:



With sound feedback

A special system monitors the door status and sends opening and closing sound signals, which can be set or completely excluded by the end user.



Set your time

The user can set the time span between the opening pulse and the automatic relocking of the

Multiblindo eMotion has three options allowing an instant opening as well as to choose the automatic relocking mode according to the user's security requirements. It is operated through an electronic control for all the settings.


Total. When pressing the pushbutton the door opens and a sound signal is produced. When it closes, Multiblindo eMotion will automatically trigger the latchbolt and deadbolts: the sound feedback will indicate the total locking. Total security: this setting ensures your door the highest security.

Light. When pressing the pushbutton the door opens and a sound signal is produced. When it closes, Multiblindo eMotion will automatically trigger the latchbolt only: a different and more flexible security level for a partial and fast locking.

Free. With this setting, Multiblindo eMotion keeps the latchbolt and deadbolts completely unlocked: the door will stay in a free-opening status, in the classic hold-open situation. Total freedom ensuring a free access both from inside and outside until a new setting is given.

Conventional definition of door handing.





DIN right (Inside left hand)

DIN right (Outside left hand)




DIN left (Outside right hand)







Multiblindo Motion 92 mm centre distance



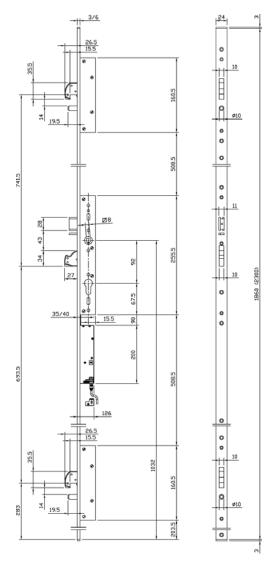

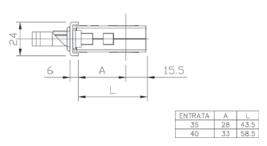

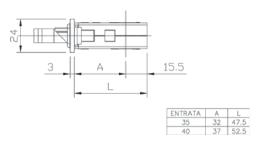

ELECTROMECHANICAL 12V D.C. MULTIPOINT mortice lock for metal frames,

AUTOMATIC LOCKING OF THE LATCHBOLT AND 3 DEADBOLTS, ROTATING HOOK DEVIATORS,

Central lock, handle follower centre distance mm 92, operating with European profile cylinder.

Right or left latchbolt, non reversible.

Deadbolts and latchbolt operated by key, handle or motor.

Lock and deviators deadbolts mm 27 throw, with anti-drill and anti-cut cover plates in carbonitrided steel.

Connection cable, 2 nylon end blocks for U-version. Fixing screws. Instruction sheet.

Accessories to be ordered separately:

Striking plates

U-front plate

mechanical strikers 033202 - 033203 strikers for deviators 033167 - 033171

Flat front plate

mechanical striker 033200 - 033201 strikers for deviators 033165 - 033169